


# Automotive Cable

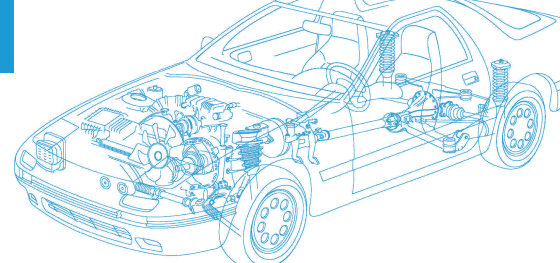


## CAVUS

### Application:

This PVC insulated single-core cable is used for automotive wiring.

### Construction:

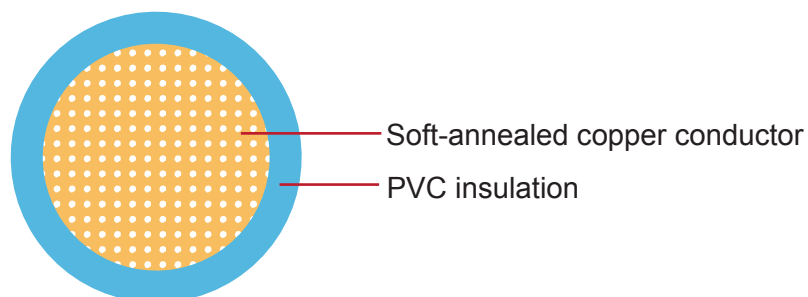

Soft-annealed copper conductor

PVC insulation

**Conductor:** Cu-ETP1 according to JIS C 3102

**Insulation:** PVC

**Standard Compliance:** JASO D 611-94

### Technical Parameters:

**Operating temperature:** - 40 °C to +80 °C

Nominal Cross-section	Conductor			Insulation	Cable		
	No. and Dia. of Wires	Diameter max.	Electrical Resistance at 20 °C max.	Thickness Wall nom.	Overall Diameter min.	Overall Diameter max.	Weight Approx.
mm <sup>2</sup>	no./mm	mm	mΩ/m	mm	mm	mm	kg/km
1x0.30	7/0.26	0.70	50.20	0.20	1.10	1.20	4
1x0.50	7/0.32	0.90	32.70	0.20	1.30	1.40	6
1x0.85	11/0.32	1.10	20.80	0.20	1.50	1.60	9
1x1.25	16/0.32	1.40	14.30	0.20	1.80	1.90	13

\*Note: Other configurations, sizes, colors and length not specified herein are available upon request.